



**Certificate of constancy of
performance**
Nr. 04-20-246



UAB „Kiwa Inspecta“ Certification body, after actions according to STR 1.01.04:2015 system 1+ has granted this certificate as proof that

PJSC “ArcelorMittal Kryvyi Rih”,
Ordzhonikidze str. 1, Kryviy Rih, Dnepropetrovsk region, 50095, Ukraine /
Reg. No. 24432974
(name and address of the manufacturer, company code)

in the manufacturing plant

PJSC “ArcelorMittal Kryvyi Rih”,
Ordzhonikidze str. 1, Kryviy Rih, Dnepropetrovsk region, 50095, Ukraine
(address of manufacturing plant)

produced by

weldable, ribbed, hot rolled reinforcing steel coils

for the reinforcement of concrete structures
(name of product and intended use)

brand name B500B,
diameters: Ø8 - Ø24 mm
manufacturer identification marking: 9/2/2
(type of the product)

conform to

LST EN 10080:2005

requirements and values declared by manufacturer (see annex).


This certificate was first issued **2020-07-27** and will remain valid as long as the standard remains valid and the factory production control fulfils all the prescribed requirements of the standard set out above.

Date of issue **2024-04-25**

Laimutė Ditauskienė
Certification business unit manager



UAB „Kiwa Inspecta“
Ukmergės g. 308,
LT-12110 Vilnius, Lietuva
Tel. +370 5 2031395
lithuania@kiwa.com




Information about validity of this certificate is published www.kiwa.lt



Performance of the product:

Characteristics	Test method	Unit of measurement	Declared value
Yield strength, R_e	LST EN ISO 15630-1	MPa	≥ 500
Ratio tensile strength/yield strength, R_m/R_e	LST EN ISO 15630-1	-	≥ 1.08
Percentage total elongation at maximum force, A_{gt}	LST EN ISO 15630-1	%	≥ 5.0
Suitability for bending	LST EN ISO 15630-1	-	pass
Dimensional tolerances	LST EN ISO 15630-1	-	conform
Relative rib area, f_R : $\varnothing 8 \div \varnothing 12$ mm $> \varnothing 12$ mm	LST EN ISO 15630-1	-	≥ 0.040 ≥ 0.056
Tolerance of the mass per metre: $= \varnothing 8$ mm $> \varnothing 8$ mm	LST EN ISO 15630-1	%	± 6.0 ± 4.5
Weldability (carbon equivalent C_{eq})	chemical analysis	%	≤ 0.52
Durability: - carbon, C - sulphur, S - phosphorus, P - nitrogen, N - cooper, Cu	chemical analysis	%	≤ 0.24 ≤ 0.055 ≤ 0.055 ≤ 0.014 ≤ 0.85

* - manufacturer identification marking: 9/2/2

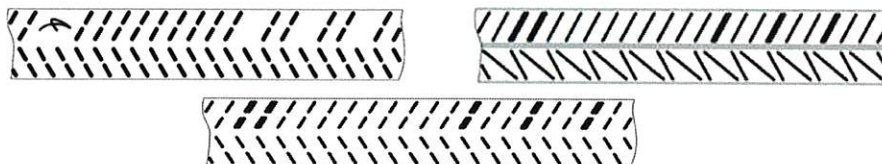

Laimutė Ditauskienė
Certification business unit manager
2024-04-25

